



IMPASTO™ 8IP220AA0T Resist 807100 18 in x 36 in ASHLAR



TOP IMPASTO 8IP220AA0T Resist 807100 18 in x 36 in BRICK

BOTTOM SECCO™ 8SH220AA0T Resist 807100

Resist 807100 18 in x 36 in MONOLITHIC



BOTTOM IMPASTO 8IP220AA0T Resist 807100 18 in x 36 in BRICK

SECCO 8SH220AA0T Resist 807100 18 in x 36 in MONOLITHIC



IMPASTO 8IP220220T Still Life 807103 24 in x 24 in ASHLAR






RIGHT
IMPASTO
8IP220AA0T
Resist 807100
18 in x 36 in
ASHLAR

LEFT

8IP220AA0T Resist 807100 18 in x 36 in MONOLITHIC

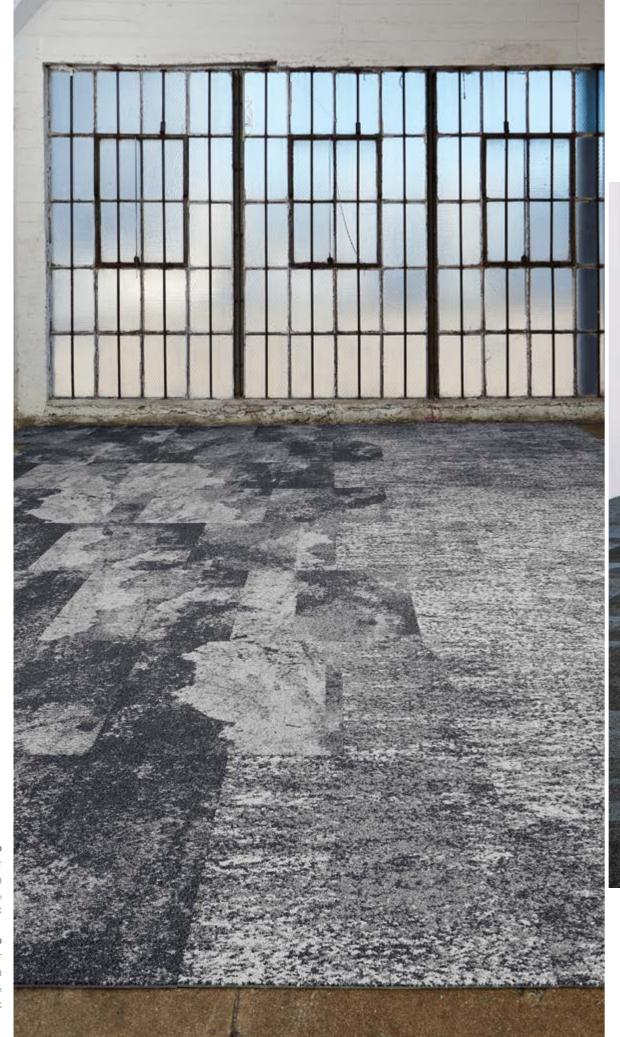

IMPASTO 8IP220220T

Still Life 807103 24 in x 24 in BRICK

SECCO

8SH220220T Still Life 807103 24 in x 24 in BRICK



IMPASTO


8IP220AA0T Tempera 807105 18 in x 36 in HERRINGBONE






IMPASTO 8IP220220T

Resist 807100 24 in x 24 in QUARTER TURN

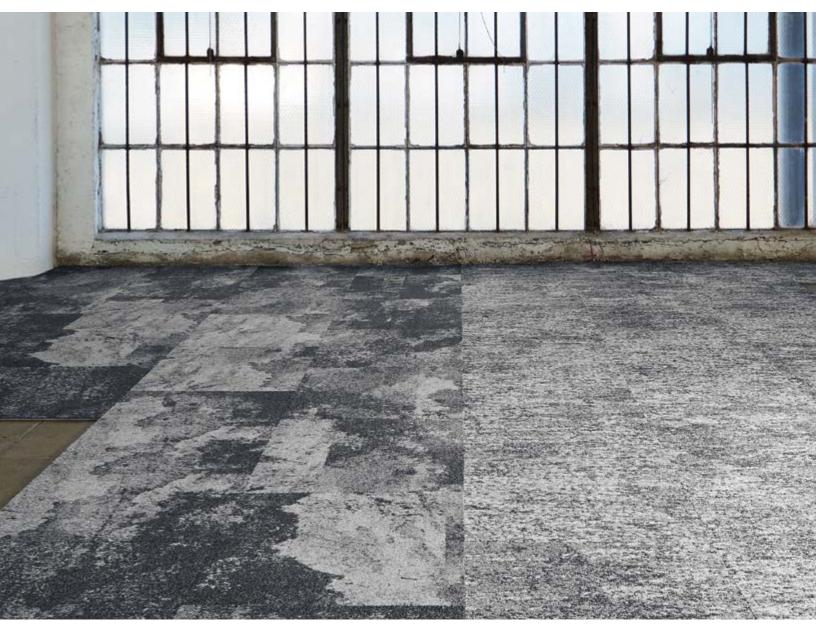


IMPASTO 8IP220220T Still Life 807103 24 in x 24 in ASHLAR **SECCO** 8SH220220T Still Life 807103 24 in x 24 in ASHLAR

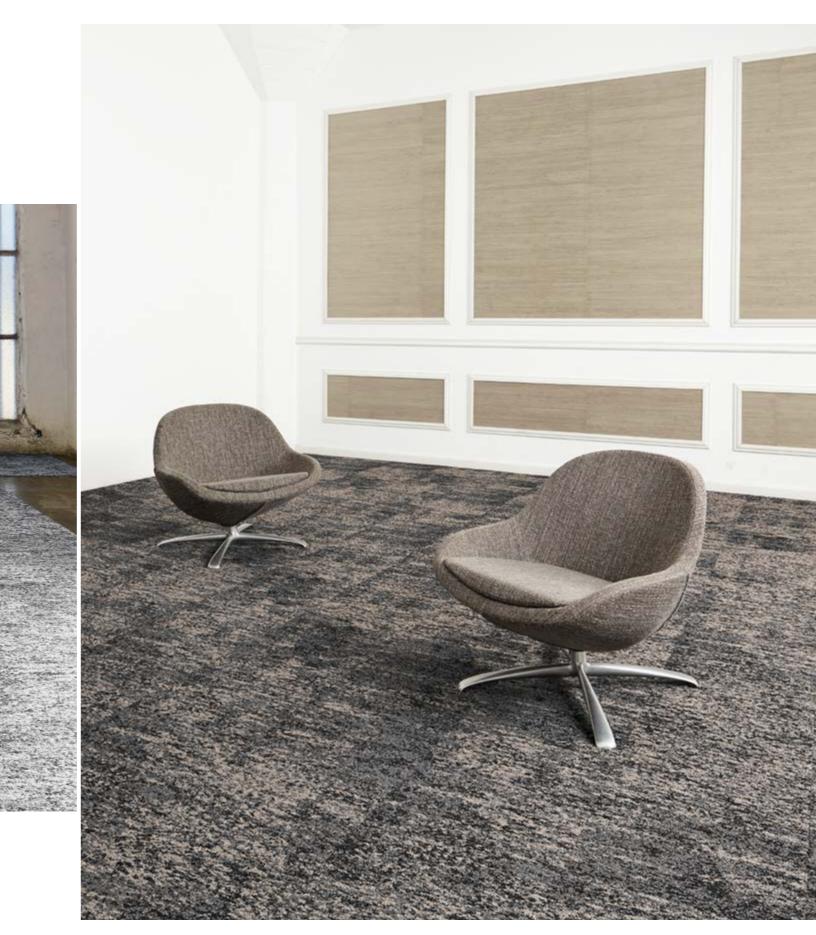

SECCO 8SH220AA0T Landscape 807109 18 in x 36 in ASHLAR



SECCO 8SH220220T Resist 807100 24 in x 24 in QUARTER TURN

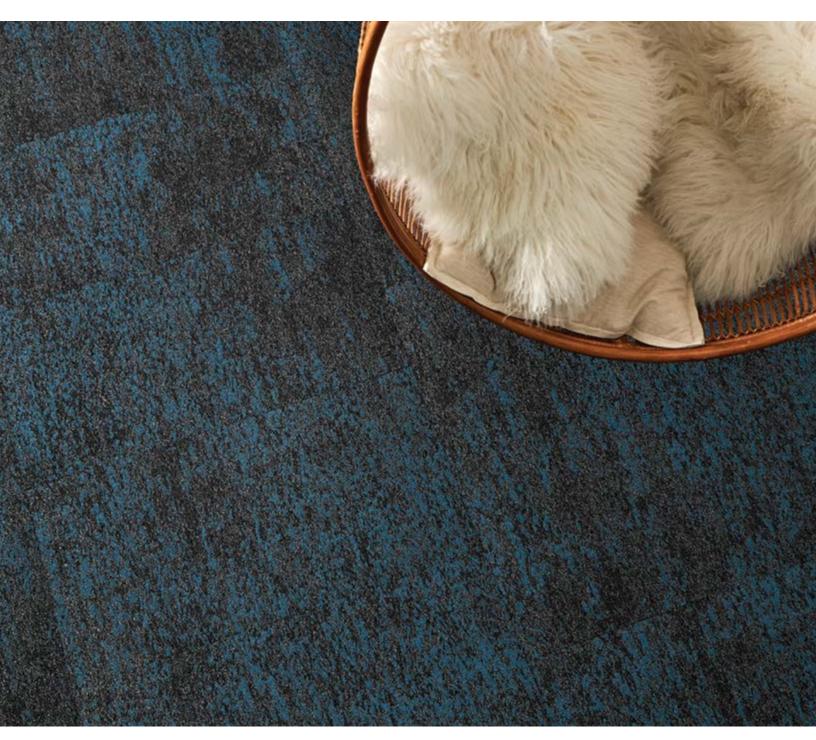

SECCO

8SH220AA0T Tempera 807105 18 in x 36 in BRICK





LEFT SECCO 8SH220AA0T Landscape 807109 18 in x 36 in

RIGHT IMPASTO 8IP220220T SECCO 8SH220220T Still Life 807103 24 in x 24 in MONOLITHIC



SECCO 8SH220620R Landscape 807109 12 ft BROADLOOM



IMPASTO 8IP220AA0T Resist 807100 18 in x 36 in ASHLAR





RIGHT SECCO 8SH220AA0T


Tempera 807105

18 in x 36 in

BRICK

LEFT

IMPASTO 8IP220620R Resist 807100 12 ft BROADLOOM IMPASTO and SECCO color line as featured in architect folder.

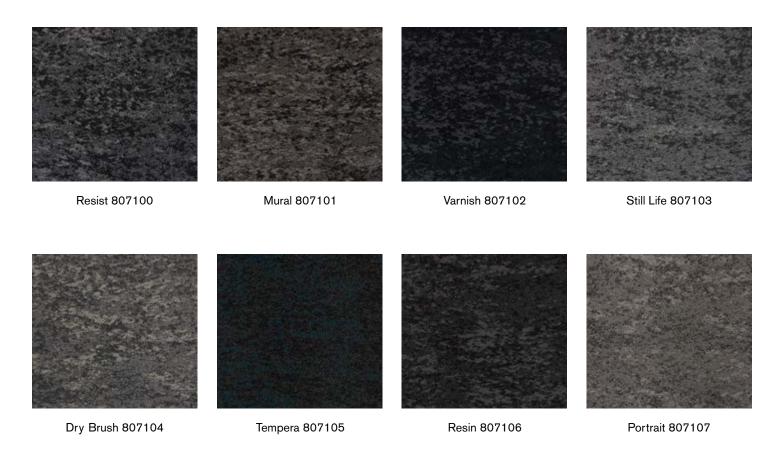



Abstract 807108



Landscape 807109

The printed images may not be an accurate reproduction of the products' actual colorways. Please note that images were taken in a loft, full of natural light. We strive to offer an authentic representation, but images may vary according to press run and location lighting. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at 800.423.4709.

SPECIFICATIONS

Style Number Product Construction Fiber Dye Method Soil/Stain Protection Secondary Backing Broadloom Carpet Tile Yarn Weight Machine Gauge Pile Height High Low Stitches Pile Density Total Weight High PerformancePC Broadloom NexStep® Cushion Tile AFIRMA[™] Hardback Tile **Total Thickness** High PerformancePC Broadloom NexStep® Cushion Tile AFIRMA™ Hardback Tile Pattern Repeat Broadloom Carpet Tile Radiant Panel Smoke Density Static Flammability

IMPASTO[™]

8IP22 Tufted Textured Loop Antron[®] Lumena[™] Type 6,6 Nylon Solution Dyed XTERA™

High PerformancePC NexStep[®] Cushion Tile / AFIRMA[™] Hardback Tile 22 oz/yd² (745.9 g/m²) 1/10 in (39.4 ends/10 cm)

0.158 in (4.0 mm) 0.104 in (2.6 mm) 10.2/in (40.2 ends/10 cm) 7,440 oz/yd3

56 oz/yd² (1,898.7 g/m²) 99 oz/yd2 (3,356.7 g/m2) 80 oz/yd² (2,712.5 g/m²)

0.245 in (6.2 mm) 0.345 in (8.8 mm) 0.225 in (5.7 mm)

72 in (182.88 cm) (W) x 180 in (457.20 cm) (L) None Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) < 450 dm Corrected (ASTM-E662), Flaming ≤ 3.5 kV (AATCC-134), Step Passes Methenamine Pill Test (CPSC-FF1-70)

SECCO™

8SH22 Tufted Textured Loop Antron[®] Lumena[™] Type 6,6 Nylon Solution Dyed XTERA™

High PerformancePC NexStep[®] Cushion Tile / AFIRMA[™] Hardback Tile 22 oz/yd² (745.9 g/m²) 1/10 in (39.4 ends/10 cm)

0.158 in (4.0 mm) 0.104 in (2.6 mm) 10.2/in (40.2 ends/10 cm) 9,171 oz/yd3

56 oz/yd² (1,898.7 g/m²) 99 oz/yd2 (3,356.7 g/m2) 80 oz/yd² (2,712.5 g/m²)


0.215 in (5.5 mm) 0.315 in (8.0 mm) 0.195 in (5.0 mm)

72 in (182.88 cm) (W) x 72 in (182.88 cm) (L) None Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) < 450 dm Corrected (ASTM-E662), Flaming ≤ 3.5 kV (AATCC-134), Step Passes Methenamine Pill Test (CPSC-FF1-70)

STYLE NUMBERS

IMPASTO	SECCO	BACKING	SIZE	cradletocradle	~
8IP220620R 8IP220AA0T	8SH220620R 8SH220AA0T	High PerformancePC Broadloom NexStep [®] Cushion Tile	12 ft (3.657 m) — Also available in Area Rugs 18 in x 36 in (45.72 cm x 91.44 cm)	SILVER	
8IP220220T 8IP220AA0K 8IP220220K	8SH220220T 8SH220AA0K 8SH220220K	NexStep [®] Cushion Tile AFIRMA™ Hardback Tile AFIRMA™ Hardback Tile	24 in x 24 in (60.96 cm x 60.96 cm) 18 in x 36 in (45.72 cm x 91.44 cm) 24 in x 24 in (60.96 cm x 60.96 cm)	NSF B	

RECOMMENDED CARPET TILE INSTALLATION METHODS



24 in x 24 in ↑ Ashlar Monolit

Brick

^	←	↑	÷	↑	
1	♠	←	↑	÷	
nic	Quarter Turn				

antron ().

Bentley's High PerformancePC, NexStep® Cushion Tile, and AFIRMA™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 - Sustainable Carpet Assessment (NSF 140). Six of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED®-EBOM) Gold certified facility. Please inquire about product warranties for specific backing options.

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose, are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2017 Bentley Mills, Inc.

BENTI EN®

Need additional samples or information? 800.423.4709 | BENTLEYMILLS.COM

